



CooVox-U50 IP Phone System

for Small and Medium Businesses



No User License Fee

All Standard PBX Features

Many Advanced PBX Features

Desktop Call Management

Firewall

Intrusion Detection

Enhanced Security Policies

Remote Backup Service

Disaster Recovery



The CooVox-U50 IP Phone System is an ideal solution for small and medium business with up to 100 extensions. Adopting the innovative modular design, it is very convenient to increase telephony ports to expand the system. CooVox-U50 supports industry standard SIP trunks, analog PSTN trunks (FXO Module), analog stations (FXS Module), and mobile GSM/WCDMA trunks (GSM/WCDMA Module).


CooVox-U50 is a next-generation Hybrid IP PBX System designed and optimized for today's business telecommunication needs. CooVox-U50 is an affordable, scalable, interoperable, secure and reliable solution which provides not only traditional PBX features such as Automated Attendant and Voicemail, but also many advanced features including Remote Extensions, Remote Office Connection, Conference Bridge, Call Recording, Call Detail Records (CDR), Automatic Call Distribution (ACD), Unified Messaging (Voicemail to Email), Web Dial and many more features.

Highlights & Features

- Fax to Email
- WebRTC/ Web Dial
- Voicemail to Email
- Console Port for easy management
- Stronger Security to Protect System

Telephony Configuration

Module	Slot 1	Slot 2
4FXS	✓	✓
4FXO	✓	✓
2FXOS	✓	✓
2GSM	✓	✓
4GSM	✓	✓
2WCDMA	✓	✓
4WCDMA	✓	✓

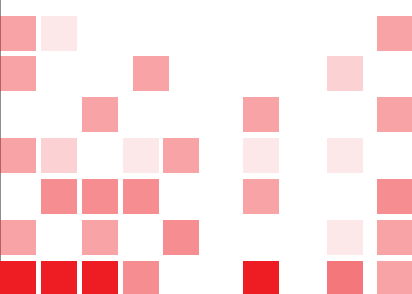

System Specifications

Call Features

Call Back
Call Forward
Call Group
Call Hold
Call Paging and Intercom
Call Park
Call Pickup
Call Queue
Call Recording
Call Routing
Blind Transfer
Attended Transfer
Call Waiting
Caller ID
Dial by Name
Music On Hold/Transfer
3-Way Conference
Video Calls

PBX Features

Black List
BLF (Busy Lamp Field)
CDR (Call Detailed Record)
Conference Room (3 Rooms)
Call Monitoring
DID (Direct Inward Dialing Number)
DISA (Direct Inward System Access)
Distinctive Ringtone
DND (Do Not Disturb)
DNIS (Dialed Number Identification Service)
Feature Codes
FOP (Flash Operation Panel) Status Monitoring
Follow Me
IVR (Interactive Voice Responses)
Mobility Extension
Multi-Language Prompts
Multi-Language GUI
One Touch Recording
Phone Book
Phone Provisioning
Pin Set
Record File Download
Ringgroup
SIP Register with UDP/TCP/TLS
SIP Trunk
Skype for SIP
Smart DID
Speed Dial
Spy
SRTP (Secure Realtime Transport Protocol)
T.38 Fax (Pass-through)
Time Based Rule
Fax to Email
WebRTC/ Web Dial
Voicemail & Voicemail to Email

System Capacities

30 Concurrent Calls
Up to 100 IP Phone Registers/Extensions
Recording: 36,000 mins (.gsm); 4,000 mins (.wav)
Voicemail: 36,000 mins (.gsm); 4,000 mins (.wav)

Codex & Protocols

Audio Codex: G.722/G.711-Ulaw/G.711-Alaw/
G.726/G.729/GSM/SPEEX
Video Codex: H.261/H.263/H.263+/H.264
Protocols: SIP (RFC3261)/IAX2
DTMF: RFC2833/SIP INFO/In-Band

Network Features

DDNS Client
DHCP Server
IPv4/IPv6/IEEE802.1Q
IP Assignment (PPPoE/DHCP/Static)
SNMP v1/v2
TR069
Static Route Table
Trouble Shooting (Ping/Traceroute)
VPN Client (L2TP/PPTP/OpenVPN/N2N/IPSec)
VPN Server (L2TP/PPTP/OpenVPN/IPSec)

Security Features

Refuse SIP Register DoS
Refuse Abort Invite DoS
Refuse SSH Login DoS
Firewall

Logs

PBX Log
Web Access Log
PBX Debug Log

Hardware Interfaces

1 Reset Button
1 Power Interface
2 Ethernet Interfaces
1 Console Interface
1 USB Interface
Slot 1/2 for Analog/GSM/WCDMA Module

Hardware Specifications

Processor: Dualcore A7 1Ghz
SDRAM: DDR3 1GB
Storage: 8GB SD Card
Power Supply: Input AC 100~240V, 50/60Hz;
Output DC 12V/2A

Environment

Working Temperature: 0 ~ 40°C
Storage Temperature: -20 ~ 55°C
Humidity: 5 ~ 95% Non-condensing

Packings

Dimension: 410 × 220 × 85mm
Weight/Unit: 2.2kg
Unit/Carton: 6 Units
Weight/Carton: 13.5kg

